


AQUA DECK - AQD

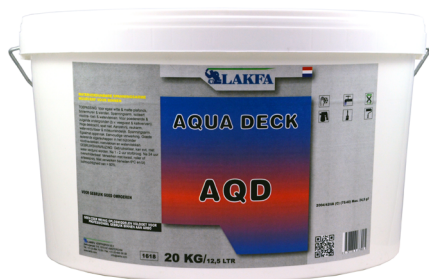

Application

For inside. For evenly white and mat ceilings, inner walls and walls. Low tension isolates nicotine-, soot- and water stains. For powdered and absorbing substrates (e.g. rub resistant paint and lime wash distemper). High covering power. Does not spatter. Lapping free, odourless, water dilutable and environmentally friendly.

Special advantages

Low tension. Evenly mat surface. Easy to use. Good isolating properties especially nicotine-, soot and water stains.

Dilution

Water, the product is ready for use. Clean Material with water.

Processing

Apply with a brush, roller or airless-spray. Do not process beneath 6°C and by an air humidity of > 80%.

Drying time

Dust dry after 1 – 2 hours. After 4 – 6 hours repaintable, dependent on temperature and air humidity.

Efficiency

Ca. 4 – 6 m²/kg, dependent on condition and suction of the substrate.

Degree of gloss

Mat

Colour

White and tintable

Package

Oval plastic pail of 20 kg

Binder

Modified alkyd emulsion

Pigment

Titanium dioxide as well as special mineral extenders

Solid matter content

Ca. 65 - 70 weight %

Specific gravity

Ca. 1.60 – 1.65 g/ml

Viscosity

1650 mPas, bij 23°C

Shelf life

1 year -Frost-free storage-

VOS

2004/42IIA (i) (140/140) Max. 32 g/ltr

Conveyance

KCA



LAKFA Verffabriek BV
Zeeburgerpad 116
1019 AE AMSTERDAM

Tel.: +31-20-6947368
Fax: +31-20-6650808
info@lakfa.com | www.lakfa.nl