


YACHT VARNISH - YA

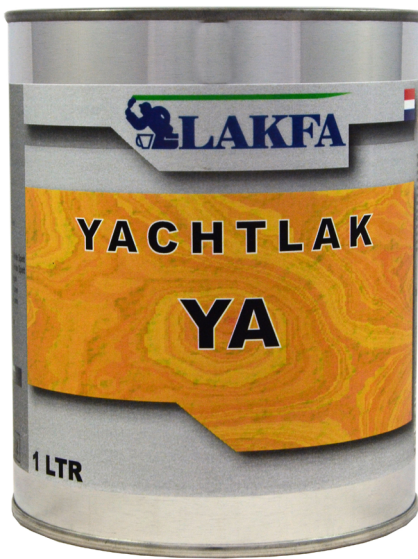

Application

For exterior. For the varnishing of yachts, as well as the long lasting treatment of doors, garden furniture, wooden walls and all wood sorts exposed to heavy weather influences.

1e layer : till 15% diluted

2e layer : till 5-8% diluted

3e & 4e layer: not diluted

Sand lightly after every layer (after ca. 48 hours), wash of sand powder and dry the substrate. The more layers the better the end result.

Special advantages

The yacht varnish distinguishes it self by its excellent filling power, water and weather resistance. Also is there a first rate relation between elasticity, scratch- and tear resistance. The exquisite high gloss stays for years.

Dilution

Ready for use, if needed with Special T. Appliances can be cleaned with Special T.

Processing

Apply with brush. Do not process beneath 6°C and by an air humidity of > 80%.

Drying time

Within 2-3 hours dust dry. After 8 - 10 hours tack free. After 24 hours repairable, dependent on temperature and air humidity.

Efficiency

Ca. 8 - 10 m²/kg, dependent on condition and suction of the substrate.

Degree of gloss

Highgloss

Colour

Colourless

Package

Carton of 20x1 kg.

Binder

Wood oil alkydphenolic resin.

Solid matter content

Ca. 50 - 55 weight %

Specific gravity

Ca. 0.918 g/ml. 23°C

Viscosity

Ca. 3 poise, at 23°C

Flash point

Ca. 36°C

Shelf life

1 year -Frost-free storage-

VOS

2004/42IIA (f) (600/500) Max. 416 g/ltr

Conveyance

KCA



LAKFA Verffabriek BV
Zeeburgerpad 116
1019 AE AMSTERDAM

Tel.: +31-20-6947368
Fax: +31-20-6650808
info@lakfa.com | www.lakfa.nl